

DC电源插座3Pin三脚立式3A24V带柱厂家LZG摄像头电源 防水DC插座

产品名称	DC电源插座3Pin三脚立式3A24V带柱厂家LZG摄像头电源 防水DC插座
生产厂家	广东小迈实业有限公司
价格	/
规格参数	品牌:LZG Type-C:3Pin立式3A24V 兼容:CUI、ADM、TIC
公司地址	东莞市横沥镇西城一区西聚路1号
联系电话	18938295875

产品详情

DC电源插座3Pin三脚立式3A24V带柱厂家LZG摄像头电源 防水DC插座

产品参数：

型号：ZB30002-05DBAP-A

包装：600/卷



ZB30002-05DBAP-A

IPX7

IP67

24V/3A



防水DC插座

致力提供防水连接器解决方案

防水






防水DC插座

源头工厂

支持定制


免费拿样

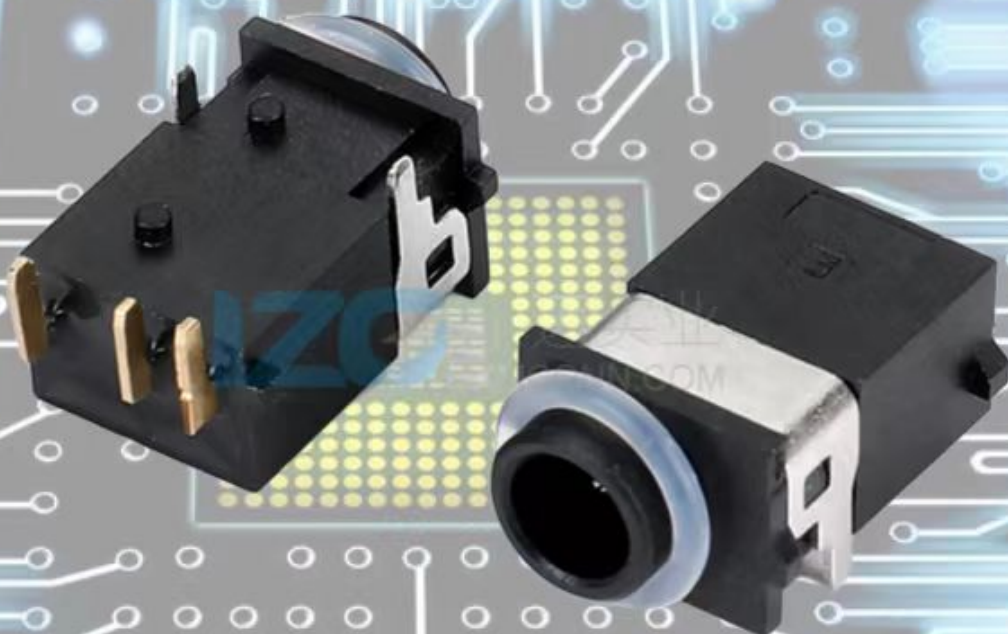

防水

ZB30002-05DBAP-A


生产厂家 欢迎来访

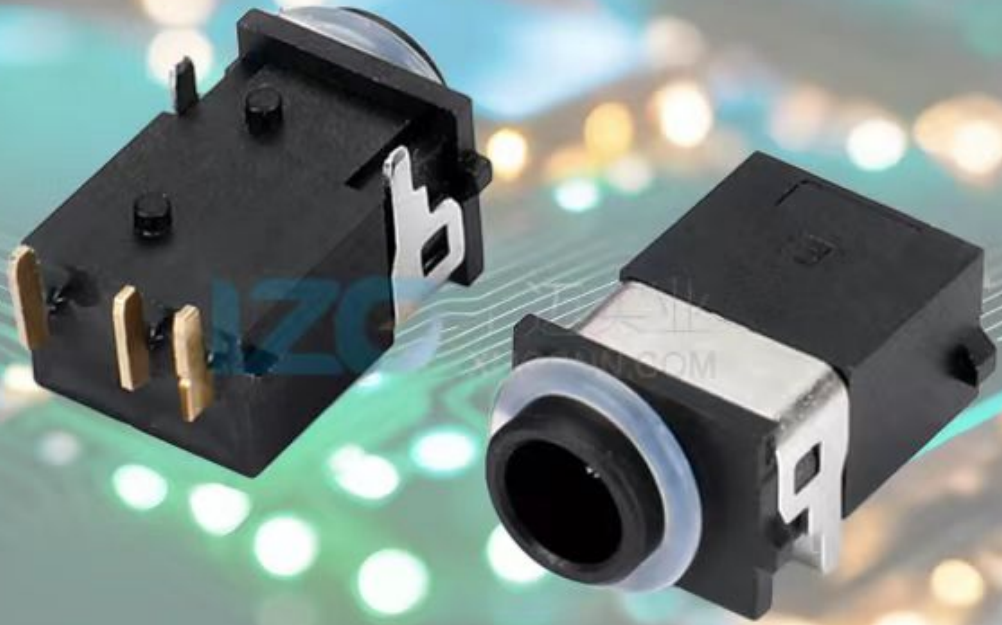

ZB30002-05DBAP-A

防水DC插座 (1.3针)

产品应用




汽车电子
Automotive Electronics



扩展坞、路由器
Docking Station, Router



通讯设备
Communication Equipment



家用电器
Household Appliances




蓝牙音响、家庭音响
Bluetooth Audio, Home Audio



安防监控
Security Monitoring



智能家居
Smart Home

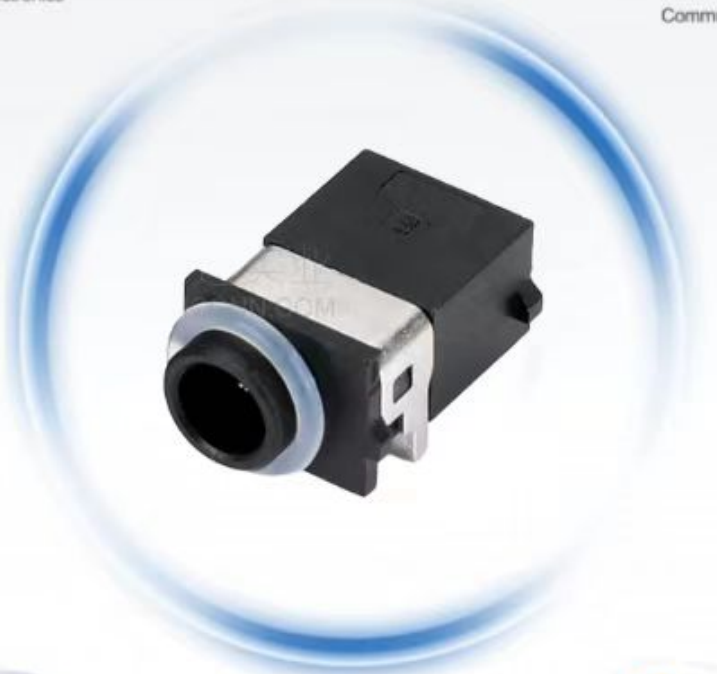

专注防水连接器生产制造

waterproof DC socket

✓ NOTES:

- 1.CURRENT RATING: 24V & 3A MAX.
- 2.CONTACT RESISTANCE: 50mΩ MAX.
- 3.INSULATION RESISTANCE:100MΩ MIN.
- 4.DIELECTRIC WITHSTANDING: 500V AC MIN.
- 5.DURABILITY: 5000 CYCLES MIN.
- 6.CONNECTOR MATING FORCES: 3N MIN.
- 7.CONNECTOR UNMATING FORCES: 35N MAX.
- 8.OPERATING TEMPERATURE: -25°C TO +85°C.
- 9.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.


ISO
9001:2015

✓
RoHS



✓ ISO
14001:2015



LZG INDUSTRIAL CO.,LTD

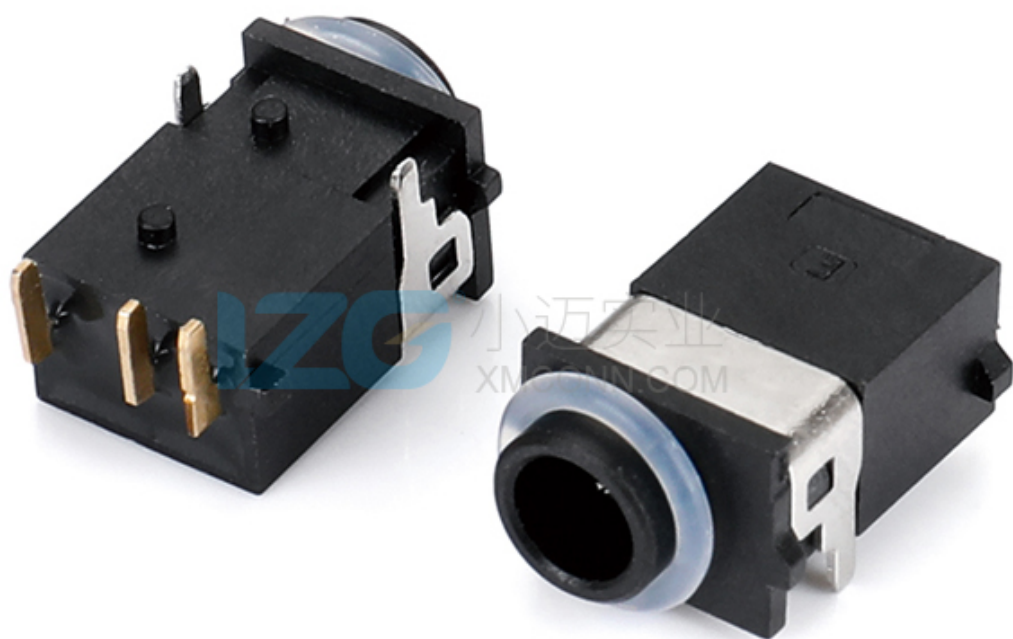





RoHS
Compliant





ZONE	EC.N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	蘇精	2020.02.18

- NOTES
1. CURRENT RATING: 24V & 3A MAX.
 2. CONTACT RESISTANCE: 50mΩ MAX.
 3. INSULATION RESISTANCE: 100MΩ MIN.
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.
 5. DURABILITY: 5000 CYCLES MIN.
 6. CONNECTOR MATING FORCES: 3N MIN.
 7. CONNECTOR UNMATING FORCES: 35N MAX.
 8. OPERATING TEMPERATURE: -25°C TO +85°C.
 9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.



3D VIEW

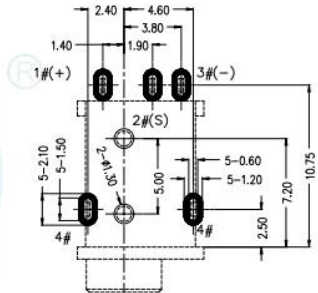

PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05



WHITE WATERPROOF RING



Not to install the waterproof ring shipment

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
8	WATERPROOF RING	SILICONE	WHITE	1
7	GLUE	EPOXY	COLOR BLACK	1
6	BACK COVER	HIGH TEMPERATURE	COLOR BLACK	1
5	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1
4	TERMINAL 4#	STAINLESS STEEL	NICKEL PLATING OVERALL	1
3	TERMINAL 3#	COPPER ALLOY	NICKEL UNDERPLATING OVERALL, Au PLATING ON THE SOLDER AREA	1
2	TERMINAL 2#	COPPER ALLOY	NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE	1
1	CENTER PIN	COPPER ALLOY	NICKEL UNDERPLATING OVERALL, Au PLATING ON THE SOLDER AREA	1



LZG INDUSTRIAL CO. LTD

PART NAME	Ø1.3 DC WATERPROOF POWER JACK
PART NO.	ZB30002-05DBAP-A

TOLERANCE UNLESS OTHERWISE SPECIFIED:	0.0±0.25	0.1±2°
	0.00±0.20	0.0°±1'
	0.000±0.10	0.00°±0.5'

UNIT:	mm
-------	----

DRAWING:	蘇精	DATE:	2020.02.18	SCALE:	1:1
CHECK:	蘇精	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	蘇精	DATE:	2020.02.18	DWG. NO.:	
DRAWING NO.:	ZB30002-05DBAP-A	SHEET:		1/1	