

4.4mm耳机插座12PIN音频接头板上十二脚插件耳机母座LZG12V0.5A

产品名称	4.4mm耳机插座12PIN音频接头板上十二脚插件耳机母座LZG
生产厂家	广东小迈实业有限公司
价格	/
规格参数	品牌:LZG 音频接口:12脚板上12V0.5A 特性:防水IPX7
公司地址	东莞市横沥镇西城一区西聚路1号
联系电话	18938295875

产品详情

4.4mm耳机插座12PIN音频接头板上十二脚插件耳机母座LZG12V0.5A

产品参数：

型号：ZB44001-12DBAP-A

NOTES:

- 1.Current Rating:12V&1Amax.
- 2.Contact Resistance:50mOhms Max.(intial)
- 3.Insulation Resistance:10OM Ohms Min./500VDC
- 4.Dielectric Withstanding Voltage:500V AC/1Minute
- 5.Mating Force:35NMax,Withdrawal Force:3N Min.
- 6.Durability:5,000Cycles



ZB44001-12DBAP-A



耳机插座

音频视频连接器制造厂家

4.4mm

12V1A



耳机插座

源头工厂

支持定制

免费拿样



4.4

ZB44001-12DBAP-A

生产厂家 欢迎来访

产品应用



汽车领域
Automotive Electronics Field



数码产品
Digital Product



电子产品
Electronics



家用电器
Household Appliances



通信产品
Communication Products



影音产品
Audio and video products



智能家居
Smart Home



专注防水连接器生产制造



∨ NOTES:

1. Current Rating: 12V&1A max.
2. Contact Resistance: 50mOhms Max.(intial)
3. Insulation Resistance: 100M Ohms Min./500V DC
4. Dielectric Withstanding Voltage: 500V AC/1Minute
5. Mating Force: 35N Max, Withdrawal Force: 3N Min.
6. Durability: 5,000 Cycles
7. Operating Temperature:-25°C to+85°C

ISO
9001:2015



✓
RoHS

✓ ISO
14001:2015







LZG INDUSTRIAL CO.,LTD


RoHS
Compliant



3D VIEW

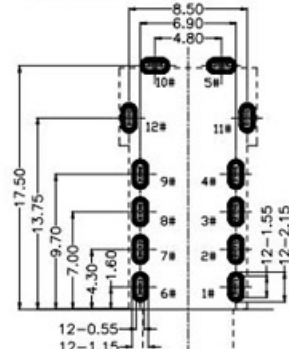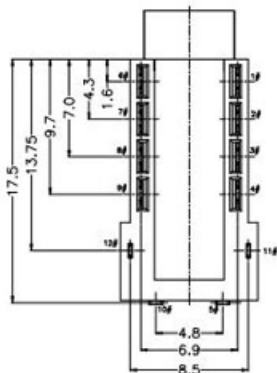

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
15	Sleeve	Copper Alloy	G/P Plated Overall.	1
14	Separator	Thermoplastics 94V-0	Color Black	1
13	Housing	Thermoplastics 94V-0	Color Black	1
12	Switch-B(+)	Stainless Steel	G/P On Contact Area& Solder Tails Ni Plated Overall.	1
11	Switch-A(-)	Stainless Steel	G/P On Contact Area& Solder Tails Ni Plated Overall.	1
5/10	Left+ Contact	Copper Alloy	G/P On Contact Area& Solder Tails Ni Plated Overall.	1
4/9	Right+ Contact	Copper Alloy	G/P On Contact Area& Solder Tails Ni Plated Overall.	1
3/8	Left- Contact	Copper Alloy	G/P On Contact Area& Solder Tails Ni Plated Overall.	1
2/7	Right- Contact	Copper Alloy	G/P On Contact Area& Solder Tails Ni Plated Overall.	1
1/6	GND Contact	Copper Alloy	G/P On Contact Area& Solder Tails Ni Plated Overall.	1

DRAWING:	林生財	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李富強	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	黃建堂	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB44001-12DBAP-A	SHEET	1/1		

LZG LZG INDUSTRIAL CO. LTD

PART NAME	Ø3.5 PHONE JACK CONNECTOR	TOLERANCE UNLESS	0.0±0.25	0.°±2'	UNIT:	mm
PART NO.	ZB44001-12DBAP-A	OTHERWISE SPECIFIED:	0.00±0.15 0.000±0.10	0.0'±1' 0.00'±0.5'		