

3.5mm防水耳机插座5PIN五脚贴片厂家LZG音频接口母座12V0.5A

产品名称	3.5mm防水耳机插座5PIN五脚贴片厂家LZG音频接口母座12V0.5A
生产厂家	广东小迈实业有限公司
价格	/
规格参数	品牌:LZG 音频接口:5脚全贴12V0.5A 特性:防水IPX7
公司地址	东莞市横沥镇西城一区西聚路1号
联系电话	18938295875

产品详情

3.5mm防水耳机插座5PIN五脚贴片厂家LZG音频接口母座12V0.5A

基本参数：

型号：ZB23012-05SBAP-A

包装：900/盘

3.5MM防水耳机插座，防水等级IPx7,产品可兼容CUI ADM TIC等品牌产品。



ZB23012-05SBAP-A

IPX7
IP67
12V1A
3.5mm



防水耳机插座

致力提供防水连接器解决方案

防水



产品应用



汽车领域
Automotive Electronics Field



数码产品
Digital Product



电子产品
Electronics



家用电器
Household Appliances



通信产品
Communication Products



影音产品
Audio and video products



智能家居
Smart Home



专注防水连接器生产制造

IZG

防水耳机插座

源头工厂

支持定制

免费拿样



防水

ZB23012-05SBAP-A

生产厂家 欢迎来访

waterproof headphone socket

✓ NOTES:

- 1.INSULATION RESISTANCE: A VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS, AFTER WHICH MEASUREMENT SHALL BE MADE. A GAUGE FOR THE MEASUREMENT SHALL BE USED THE INSULATED GAUGE.
2. CONTACT RESISTANCE: 30mΩ OR LESS
3. VOLTAGE PROOF:500V AC FOR ONE MINUTE
4. DURABILITY: 10,000 INSERTION/REMOVAL CYCLES(MINIMUM)
- 5.INSERTION FORCE: 0.4KGF~2.0KGF
- 6.WITHDRAWAL FORCE:0.4KGF~2.0KGF
- 7.WATER PROOFNESS:THIS PRODUCT IS CONFORM TO JIS STANDARD IPX7 BY WATERPROOF JACK

ISO
9001:2015

✓
RoHS

✓ ISO
14001:2015



LZG INDUSTRIAL CO.,LTD




RoHS
Compliant







ZONE	EC N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生財	2020.02.18


SPECIFICATIONS:
 1. INSULATION RESISTANCE: A VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS, AFTER WHICH MEASUREMENT SHALL BE MADE. A GAUGE FOR THE MEASUREMENT SHALL BE USED. THE INSULATED GAUGE.
 2. CONTACT RESISTANCE: 30mΩ OR LESS
 3. VOLTAGE PROOF: 500V AC FOR ONE MINUTE
 4. DURABILITY: 10,000 INSERTION/REMOVAL CYCLES (MINIMUM)
 5. INSERTION FORCE: 0.4KGF~2.0KGF
 6. WITHDRAWAL FORCE: 0.4KGF~2.0KGF
 7. WATER PROOFNESS: THIS PRODUCT IS CONFORM TO JIS STANDARD IPX7 BY WATERPROOF JACK
 8. USING PLUG: ø3.5MM, 4-POLE STEREO EARPHONE (LCH/RCH/GND/MIC) PROVIDED THAT THEY CONFORM TO JIS 06560
 9. OVAL RING
 9-1. Hardness of silicone rubber: 70°
 9-2. Horizontal flash 0.10mm max; Longitudinal flash 0.10mm max



3D VIEW

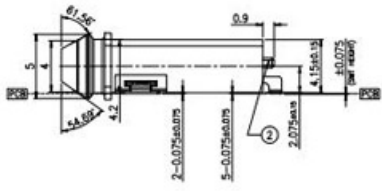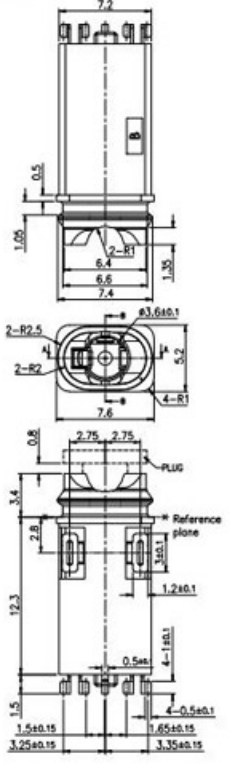

□ : TERMINAL NO. ○ : ITEM NO.

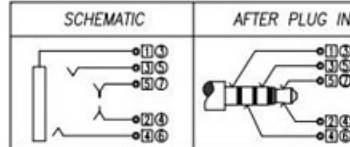

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
10	OVAL RING	SILICONE	COLOR BLUE	1
9	BOND	----	----	1
8	TERMINAL	C2680 t=0.2	1±0N(1µm or more), 2nd±1N(1N 2µm or more)/Plating	2
7	TIP SPRING-2	Ti-Cu t=0.2	1±0N(1µm or more), 2nd±0.5N(0.5µm or more) Plating	1
6	RING SPRING-2	Ti-Cu t=0.2	1±0N(1µm or more), 2nd±0.5N(0.5µm or more) Plating	1
5	RING SPRING-1	Ti-Cu t=0.2	1±0N(1µm or more), 2nd±0.5N(0.5µm or more) Plating	1
4	TIP SPRING-1	Ti-Cu t=0.2	1±0N(1µm or more), 2nd±0.5N(0.5µm or more) Plating	1
3	EARTH SPRING	Ti-Cu t=0.2	1±0N(1µm or more), 2nd±0.5N(0.5µm or more) Plating	1
2	COVER	PART 94V-0	COLOR BLACK	1
1	HOUSING	PART 94V-0	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

LZG LZG INDUSTRIAL CO. LTD

DRAWING:	林生財	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李宏德	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	林生財	DATE:	2020.02.18	DWG. NO.:	
DRAWING NO.:	ZB23012-05SBAP-A	SHEET:			1/2

PART NAME	WATERPROOF ø3.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	0.°±2'	UNIT:	mm
PART NO.	ZB23012-05SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20 0.000±0.10	0.0°±1' 0.00°±0.5'		