

### 3.5防水耳机插座6PIN板上六脚贴片厂家LZG音频母座12V0.5A

产品名称	3.5防水耳机插座6PIN板上六脚贴片厂家LZG音频母座12V0.5A
生产厂家	广东小迈实业有限公司
价格	/
规格参数	品牌:LZG 音频接口:6p板上12V0.5A 特性:防水IPX7
公司地址	东莞市横沥镇西城一区西聚路1号
联系电话	18938295875

### 产品详情

#### 3.5防水耳机插座6PIN板上六脚贴片厂家LZG音频母座12V0.5A

基本参数：

型号：ZB23002-06SBAP-A

包装：700/盘



ZB23002-06SBAP-A

**IPX7**

**IP67**

**12V/0.5A**

**3.5mm**



**防水耳机插座**

致力提供防水连接器解决方案

**防水**





# 防水耳机插座

源头工厂

支持定制

免费拿样



# 防水

ZB23002-06SBAP-A

## 生产厂家 欢迎来访

# 产品应用



汽车领域  
Automotive Electronics Field



数码产品  
Digital Product



电子产品  
Electronics



家用电器  
Household Appliances



影音产品  
Audio and video products



通信产品  
Communication Products



智能家居  
Smart Home



## 专注防水连接器生产制造

# 产品应用



汽车领域  
Automotive Electronics Field



数码产品  
Digital Product



电子产品  
Electronics



家用电器  
Household Appliances



影音产品  
Audio and video products



通信产品  
Communication Products



智能家居  
Smart Home



## 专注防水连接器生产制造

## waterproof headphone socket

### ∨ NOTES:

---

1. CURRENT RATING: 0.5A / DC 12V.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30NX.
8. SALT SPRAY: 24HOUR.
9. WATERPROOF LEVEL: IPX7.
10. OPERATING TEMPERATURE: -25°C TO +85°C.


ISO  
9001:2015

✓  
RoHS

✓ ISO  
14001:2015



**LZG INDUSTRIAL CO.,LTD**

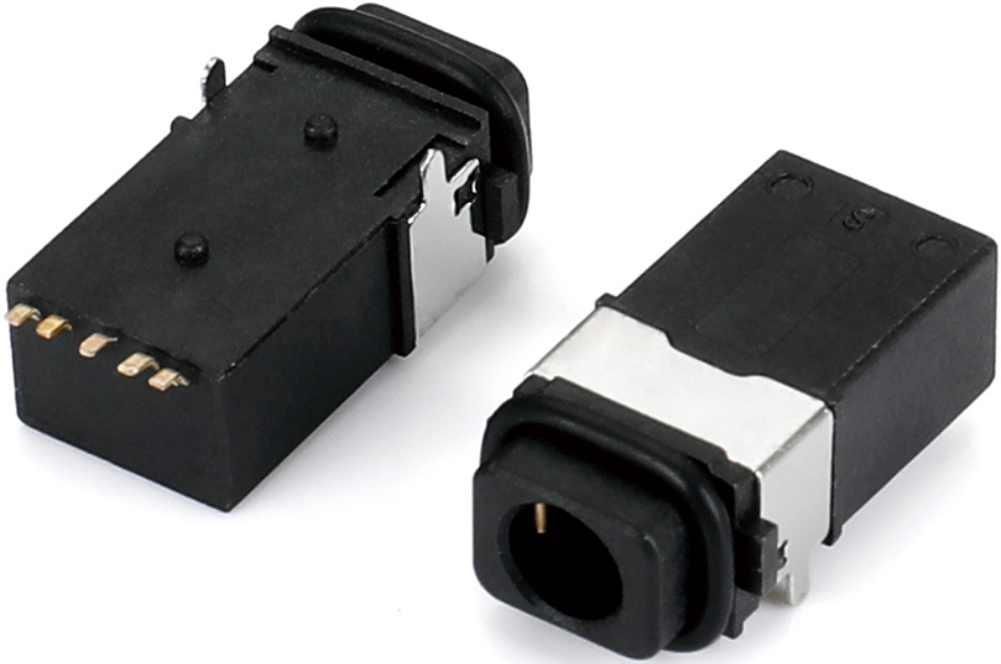


RoHS  
Compliant








ZONE	EC.N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生財	2020.02.18





- NOTES
1. CURRENT RATING: 0.5A / DC 12V.
  2. CONTACT RESISTANCE: 50mΩ MAX.
  3. INSULATION RESISTANCE: 100MΩ MIN.
  4. DIELECTRIC WITHSTANDING: 500V AC MIN.
  5. DURABILITY: 5000 CYCLES MIN.
  6. CONNECTOR MATING FORCES: 3~30N.
  7. CONNECTOR UNMATING FORCES: 3~30NX.
  8. SALT SPRAY: 24HOUR
  9. WATERPROOF LEVEL: IPX7.
  10. OPERATING TEMPERATURE: -25°C TO +85°C.



3D VIEW

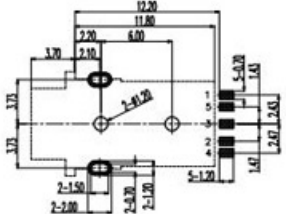

PCB LAYOUT (TOP VIEW)  
TOLERANCE: ±0.05



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
9	GLUE	EPOXY	COLOR BLACK	1
8	COVER	HIGH TEMPERATURE	COLOR BLACK	1
7	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1
6	TERMINAL 6#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING	1
5	TERMINAL 5#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING	1
4	TERMINAL 4#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING	1
3	TERMINAL 3#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING	1
2	TERMINAL 2#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING	1
1	TERMINAL 1#	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING	1

**LZG** LZG INDUSTRIAL CO. LTD

DRAWING:	林生財	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李安森	DATE:	2020.02.18	MATERIAL:	*

PART NAME	WATERPROOF 03.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	0.1±2'	UNIT: mm
PART NO.	ZB23002-06SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20 0.000±0.10	0.0'±1' 0.00'±0.5'	

APPROVAL:	林生財	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB23002-06SBAP-A			SHEET	1/1