

## 防水Micro USB母座卧式2柱沉板5Pin防水IPX7数据接口1.8A厂家LZG

产品名称	防水Micro USB母座卧式2柱沉板5Pin防水IPX7数据接口1.8A
生产厂家	广东小迈实业有限公司
价格	/
规格参数	品牌:LZG Micro:5Pin沉板带柱1.8A 特性:防水IPX7
公司地址	东莞市横沥镇西城一区西聚路1号
联系电话	18938295875

### 产品详情

#### 防水Micro USB母座卧式2柱沉板5Pin防水IPX7数据接口1.8A厂家LZG

规格：ZB43002-05SBAP-A，包装MPQ:1000PCS/盘

端口数量：1安装类型：沉板贴片额定电流：0.5AIP等级：IP67



防水Micro

源头工厂

支持定制

免费拿样



防水

ZB43002-05SBAP-A

生产厂家 欢迎来访

# 产品应用



汽车领域  
Automotive Electronics Field



数码产品  
Digital Product



电子产品  
Electronics



家用电器  
Household Appliances



影音产品  
Audio and video products



通信产品  
Communication Products



智能家居  
Smart Home



## 专注防水连接器生产制造



ZB43002-05SBAP-A

**IPX7**

**IP67**

**1.8A**



**防水Micro usb**

致力提供防水连接器解决方案

**防水**







## waterproof Micro serie

### ✓ NOTES:

---

#### 1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)

1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)

1-3. DIELECTRIC WITHSTANDING VOLTAGE:

300V AC FOR ONE MINUTE.

1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC

#### 2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 3.6 KGF (MAX)

2-2. WITHDRAWAL FORCE : 0.8 KGF(Reference)

3. DURABILITY: 10,000 CYCLES .

4. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1m,30min)

ISO  
9001:2015

✓  
RoHS



✓ ISO  
14001:2015








**LZG INDUSTRIAL CO.,LTD**

RoHS  
Compliant

ZONE	ECN.N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	蔡生財	2020.02.18



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
    - RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
    - CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
    - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
    - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
  - MECHANICAL CHARACTERISTICS:
    - INSERTION FORCE : 3.6 KGF (MAX)
    - WITHDRAWAL FORCE : 0.8 KGF(Reference)
  - DURABILITY: 10,000 CYCLES .
  - WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7(1m,30min)
  - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
  - OVAL RING
  - 6-1. The amount of low molecular siloxanes(D3~D10) is less than 200ppm
  - 6-2. Hardness of silicone rubber:70°
  - BODY WITH O-RING'S SEAL AREA BURRS IS 0.05mm Max.
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - PACKAGING: TAPE & REEL.

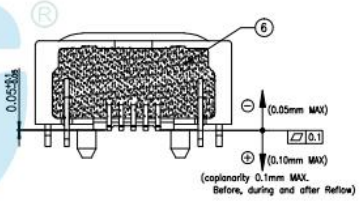

6	BOND	-----	-----	1
5	TERMINAL	C2680 T=0.3	Matte Sn 80u" Ni 40u" Min underplate	2
4	CONTACT	C2680 T=0.20	Gold flash plating on contact area Matte Tin 50u"min on solder tail Nickel 50u"min plating all over.	5
3	SHELL	SUS 304 T=0.25	Nickel 50u"min plating all over	1
2	INSERT MOLDING	LCP UL94 V-0	COLOR BLACK	1
1	HOUSING	PART UL94 V-0	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

**LZG** LZG INDUSTRIAL CO. LTD

PART NAME	Micro USB Waterproof Connector	TOLERANCE UNLESS OTHERWISE SPECIFIED:	0.0±0.3 0.00±0.2 0.000±0.05	0.°±2° 0.0°±1° 0.00°±0.5°	UNIT: mm	
PART NO.	ZB43002-05SBAP-A					

DRAWING:	蔡生財	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李安鑫	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	蔡生財	DATE:	2020.02.18	DWG. NO.:	
DRAWING NO.:	ZB43002-05SBAP-A			SHEET:	1/2