

防水Micro USB母座卧式带柱沉板5Pin防水IPX7数据接口1.8A厂家LZG

产品名称	防水Micro USB母座卧式带柱沉板5Pin防水IPX7数据接口1.8A
生产厂家	广东小迈实业有限公司
价格	/
规格参数	品牌:LZG Micro:5Pin卧式带柱1.8A 特性:防水IPX7
公司地址	东莞市横沥镇西城一区西聚路1号
联系电话	18938295875

产品详情

防水Micro USB母座卧式带柱沉板5Pin防水IPX7数据接口1.8A厂家LZG

规格：ZB43003-05SBAP-A，包装MPQ:1000PCS/盘

端口数量：1安装类型：沉板贴片额定电流：0.5AIP等级：IP67




防水Micro

源头工厂

支持定制

免费拿样

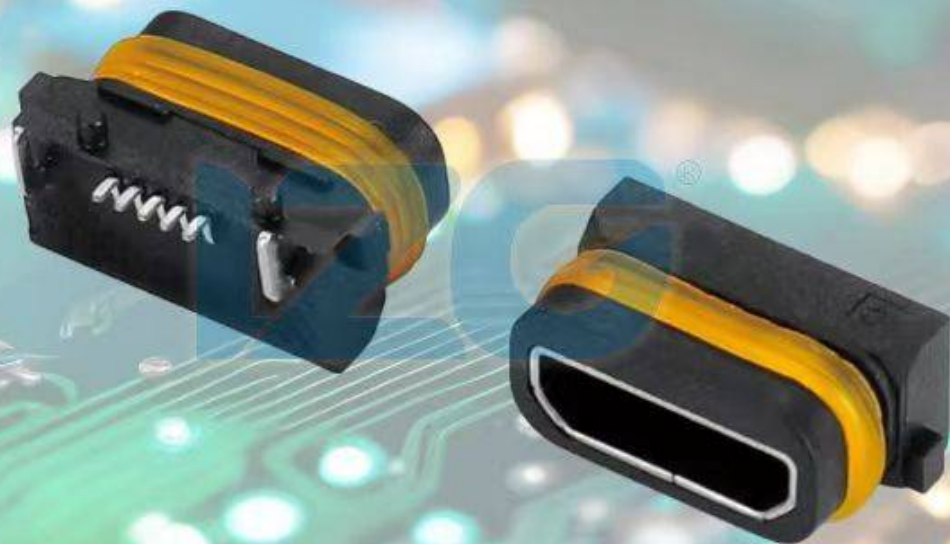

防水

ZB43003-05SBAP-A

生产厂家 欢迎来访



ZB43003-05SBAP-A

IPX7

IP67

1.8A



防水Micro usb

致力提供防水连接器解决方案

防水



产品应用



汽车领域
Automotive Electronics Field



数码产品
Digital Product



电子产品
Electronics



家用电器
Household Appliances



影音产品
Audio and video products



通信产品
Communication Products



智能家居
Smart Home



专注防水连接器生产制造



waterproof Micro serie

✓ NOTES:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)

1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)

1-3. DIELECTRIC WITHSTANDING VOLTAGE:

300V AC FOR ONE MINUTE.

1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 3.6 KGF (MAX)

2-2. WITHDRAWAL FORCE : 0.8 KGF(Reference)

3. DURABILITY: 10,000 CYCLES .

4. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1m,30min)

ISO
9001:2015



✓
RoHS

✓ ISO
14001:2015







LZG INDUSTRIAL CO.,LTD

RoHS
Compliant




DESCRIPTION
INITIAL

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 3.6 KGF (MAX)
 - WITHDRAWAL FORCE : 0.8 KGF(Reference)
 - DURABILITY: 10,000 CYCLES .
 - WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7(1m,30min)
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - OVAL RING
 - The amount of low molecular siloxanes(D3~D10)is less than 200ppm
 - Hardness of silicone rubber:70°
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE & REEL.



Oval Ring assembly state:



6	BOND			1
5	OVAL RING			1
4	CONTACT	COPPER ALLOY T=0.20	Under plating: Ni plating Contact area: Gold flash plating Soldering area: Sn plating	5
3	SHELL	STAINLESS STEEL T=0.25	1st: Cu, 2nd: Ni PLATED	1
2	INSERT MOLDING	PA9T UL94 V-0	COLOR BLACK	1
1	HOUSING	PA9T UL94 V-0	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

LZG

LZG INDUSTRIAL CO. LTD

PART NAME	Mirco USB Waterproof Connector	TOLERANCE UNLESS	0.0±0.3	0.1±2'	UNIT:	mm
PART NO.	ZB43003-05SBAP-A	OTHERWISE SPECIFIED:	0.00±0.2 0.000±0.05	0.0'±1' 0.00'±0.5'		

DRAWING:	林生財	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	林建生	DATE:	2020.02.18	DWG. NO.:	
DRAWING NO.:	ZB43003-05SBAP-A			SHEET	1/2